

## **FIRE BLANKET - DS/EN 1869:2019**

- The safe and easy way to extinguish small fires in liquids

#### Product no.: MR7500



**B**-fire: Flammable liquids



Lotek's certified fire blanket is the optimal solution for extinguishing fires involving small quantities of liquids, such as deep fryers, oil drums, barrels, etc. The fire blanket is also the best option for extinguishing fires on or involving people.

The blanket quickly and effectively smothers the flames by cutting off the oxygen supply. Unlike conventional fire extinguishers, which can cause harm when used on people, the fire blanket ensures fast extinguishing without negative side effects.

In general, using a fire blanket minimizes the extent of secondary damage.

The fire blanket is woven from glass fiber yarn with a thickness of 0.4 mm. It is flexible, strong, very lightweight, and has a very high melting point.

### Easy and quick to access

The fire blanket can be mounted on a wall, cabinet, or similar surface.

Supplied in a plastic box with an opening at the bottom. The blanket has two attached straps, allowing for quick and easy removal in case of fire.







More than

of safety experience


# FIRE BLANKET — DS/EN 1869:2019 - The safe and easy way to extinguish small fires in liquids

### **Specifications:**

Product no.:		MR 7500
Fabric type:		TG-430 TS
Length		1.800 mm
Width		1.200 mm
Total m <sup>2</sup>		2,16 m <sup>2</sup>
Thickness		0.4 mm
Weave		Broken twill 1/3
Yarn	Warp	EC9-68 x 2 z 80
	Weft	EC9-136 z 28
Thread count per cm	Warp	19,0
	Weft	11,0
Tensile strenght N/5 cm	Warp	≥4300
	Weft	≥2500
Weight		0,960 kg
Max temperature		600° C
Certification		DS/EN 1869:2019



### **DIMENSIONS OF FIRE BLANKET BOX**

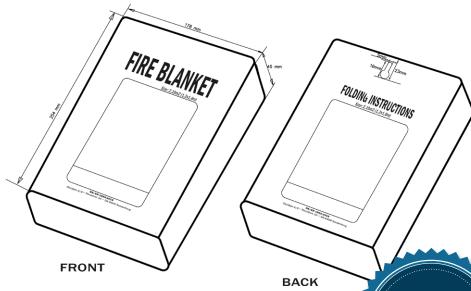

**FIRE RESCUE SAFETY** 

With more than 40 years of experience, Lotek A/S is today one of Denmark's leading suppliers of solutions within fire, rescue, and safety. The company's exclusive agencies for high-quality system components ensure that our customers receive the right quality at the right price.