


# MARINE ANTI-LEAK TAPE

## - Datasheet

To prevent the spray of hot liquids

Marine anti-leak tape or T-ISS Spray Stop Anti-Splashing Tape is used for applications in the marine & offshore industry. This hightech laminated multilayer aluminium tape, has been designed by safety specialists in order to prevent spray outs of hazardous liquids (oil / fuel) from tubing systems. Leakage of hazardous liquids can lead to fires, explosions, or other dangerous situations. This is why these pipes need proper protection. According to SOLAS regulations, ships should apply appropriate protection to prevent leakage/splashing of flammable oil from FO, LO hydraulics, and other systems. These regulations are in place to protect the lives of those at sea, safeguard the marine environment, and ensure the safe operation of ships.

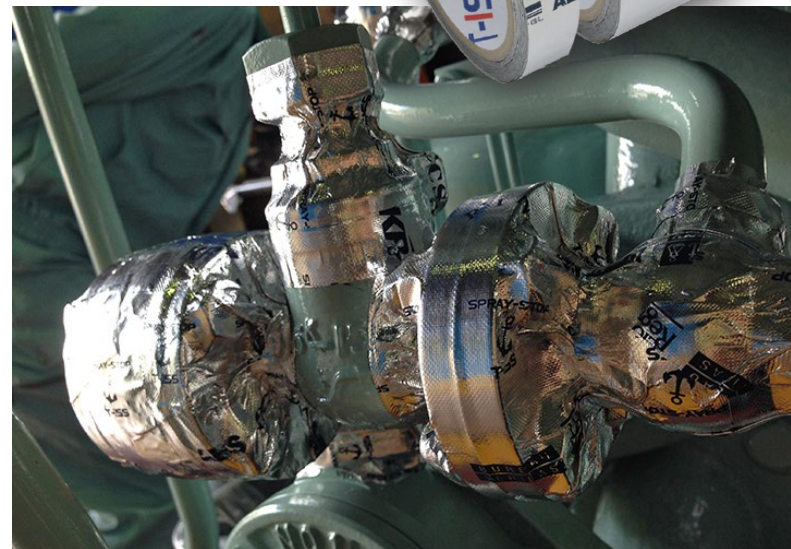

### Benefits

The tape is recommended on connections in the following situations and where flammable and hot liquids are in service:

- Fuel oil injections pipes, fuel oil service pipes, fuel oil valve cooling oil pipes and all joint connections
- LFO & HFO service pipes and hydraulic oil pipes
- Flammable oil pipes
- Flammable oil pump and strainer
- Hydraulic piping
- Boiler, thermal oil heater, incinerator

### Specifications

This high-tack protection tape is designed to prevent the spray of hot liquids, which could come into contact with materials inside process plants, potentially causing damage to equipment and endangering operators.

- Max pressure bar: 15 bar
- Max temperature: +160°C continuously, +200°C shortly
- Adhesive material tolerance: -70°C up to +200°C
- Adhesion: 1000 g above; 25 mm g/f
- Shelflife: Minimum 3 years properly stored

In compliance with SOLAS amendments, Chapter 2-2 regulation 4, chapter 2.2.5.3 and IMO A.653(16).

Product no.	Description	Dimensions	Weight
SPST0035	Anti-splashing tape	35 mm x 10 m	0,13 kg
SPST0050	Anti-splashing tape	50 mm x 10 m	0,19 kg
SPST0075	Anti-splashing tape	75 mm x 10 m	0,28 kg
SPST0100	Anti-splashing tape	100 mm x 10 m	0,38 kg
SPST0140	Anti-splashing tape	140 mm x 10 m	0,53 kg
SPST0250	Anti-splashing tape	250 mm x 10 m	0,94 kg