

# PARACHUTE SIGNAL ROCKET

- Designed to withstand exceptional environmental exposure

Product no.: White - MA5000095 or Red - MA5000096



## Application

A day or night long-range distress signal. 12 may be carried on ships bridge and there is a requirement for 4 in ships lifeboats and liferafts.

Also suitable for use in other commercial and recreational boats. Available in red and white.


## Specifications

- Length: 287 mm (11.3 in)
- Diameter at handle: 38 mm (1.5 in)
- Diameter: 32 mm (1.25 in)
- Weight Max: 245g (8.23 oz)
- NEC Max: 92g (3.25 oz)
- Light intensity: 30,000 candela
- Burning time: 40 seconds
- Colour of light: red
- Ignition: pull-wire ignitor
- Altitude: 300 m (985 ft)

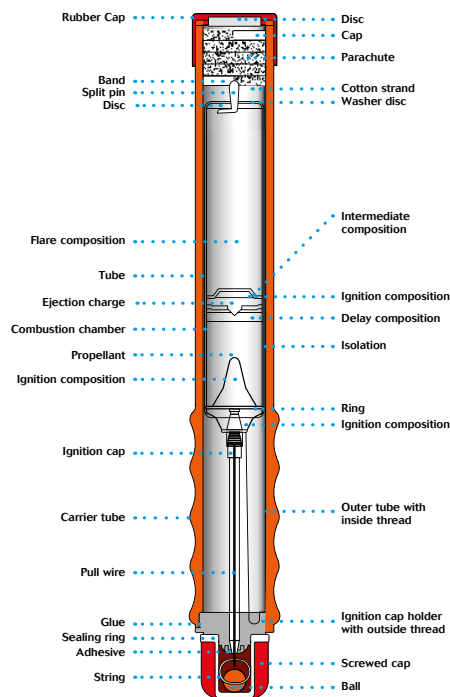

## Operation

1. Hold signal firmly by ribbed handle. Unscrew RED bottom cap.
2. Hold rocket vertically above head pointing away from body.
3. Ensure hands remain clear of top. To fire - pull red ball sharply down.

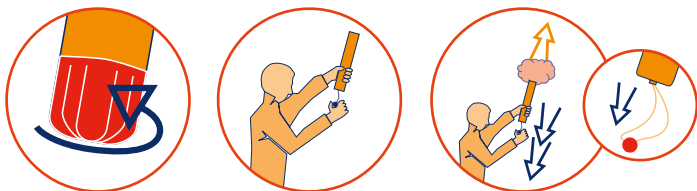

## Storage

Ideally, should be stored in the robust, specially designed Polybottle, or in a dry, easily accessed location at ambient temperature.

## Approvals

Conforms to SOLAS 74 as amended, IMO Resolution 96/98/EC. MED - BGV 425.005, BAM-P2-0059, 0589-P2-0046, USCG and other major maritime authorities world wide.



### WARNING

- Produces red hot flame - do not point at people
- Do not fire in a confined space
- Keep out of reach of children

- Only for emergency use at sea
- If damaged or dented do not use
- Do not dismantle
- Keep away from source of heat
- Do not use after expiry date

### DISPOSAL

Pyrotechnics must be treated as hazardous items and must be disposed of responsibly in accordance with local regulations.